


Manipulators

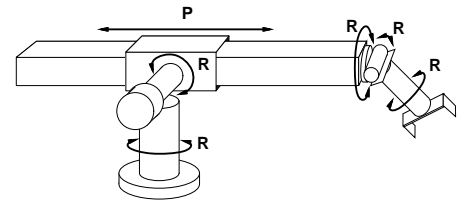


Configuration of robot specified by 6 numbers
 ⇒ 6 degrees of freedom (DOF)

6 is the minimum number required to position end-effector arbitrarily.
 For dynamical systems, add velocity for each DOF.

Outline


- Robots, Effectors, and Sensors
- Localization and Mapping
- Motion Planning
- Motor Control

Non-holonomic robots



A car has more DOF (3) than controls (2), so is **non-holonomic**;
 cannot generally transition between two infinitesimally close configurations

Mobile Robots

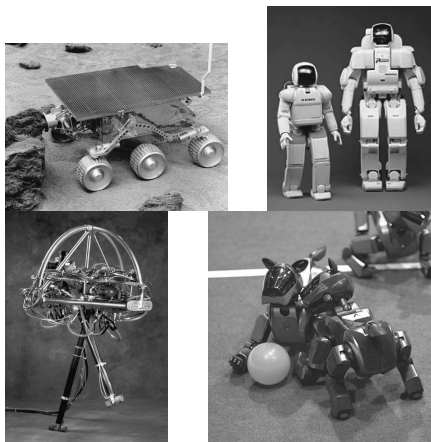

Sensors


Range finders: sonar (land, underwater), laser range finder, radar (aircraft), tactile sensors, GPS



Imaging sensors: cameras (visual, infrared)
Proprioceptive sensors: shaft decoders (joints, wheels), inertial sensors, force sensors, torque sensors


Localization—Where Am I?

Compute current location and orientation (pose) given observations:

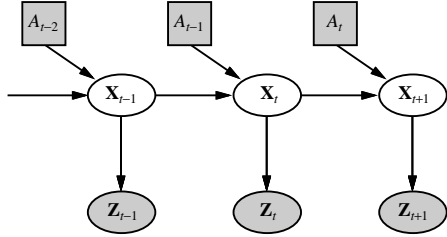


Localization contd.

Can also use **extended Kalman filter** for simple cases:

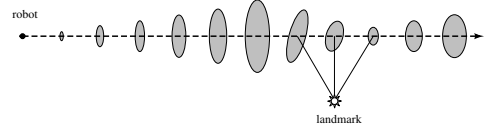

Assumes that landmarks are *identifiable*—otherwise, posterior is multimodal

Localization contd.

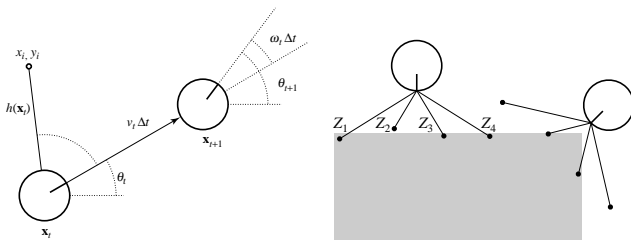

Assume Gaussian noise in motion prediction, sensor range measurements

Mapping

Localization: given map and observed landmarks, update pose distribution

Mapping: given pose and observed landmarks, update map distribution


SLAM: given observed landmarks, update pose and map distribution

Probabilistic formulation of SLAM:


add landmark locations L_1, \dots, L_k to the state vector,
proceed as for localization

Localization contd.


Can use **particle filtering** to produce approximate position estimate

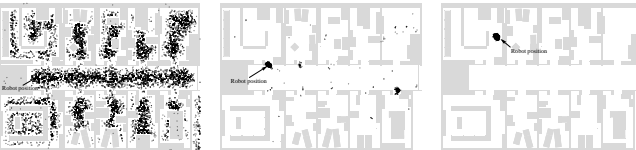

Mapping contd.

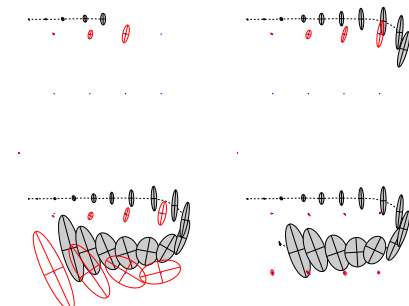


3D Mapping example

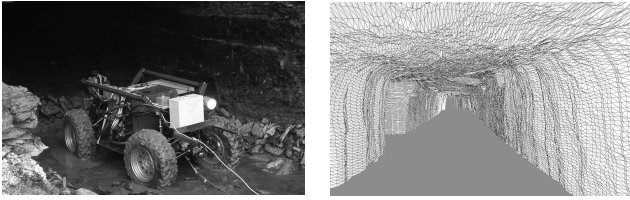

Chapter 25 13

Cell decomposition example

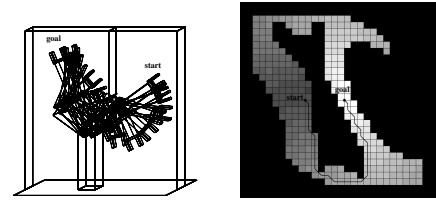


Problem: may be no path in pure freespace cells
 Solution: recursive decomposition of mixed (free+obstacle) cells

Chapter 25 16

Motion Planning

Idea: plan in **configuration space** defined by the robot's DOFs

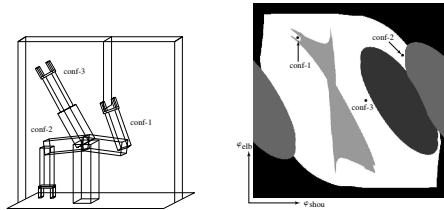


Solution is a point trajectory in free C-space

Chapter 25 14

Skeletonization: Voronoi diagram

Voronoi diagram: locus of points equidistant from obstacles



Problem: doesn't scale well to higher dimensions

Chapter 25 17

Configuration space planning

Basic problem: ∞^d states! Convert to **finite** state space.

Cell decomposition:

divide up space into simple **cells**,
 each of which can be traversed "easily" (e.g., convex)


Skeletonization:

identify finite number of easily connected points/lines
 that form a graph such that any two points are connected
 by a path on the graph

Chapter 25 15

Skeletonization: Probabilistic Roadmap

A probabilistic roadmap is generated by generating random points in C-space and keeping those in freespace; create graph by joining pairs by straight lines



Problem: need to generate enough points to ensure that every start/goal pair is connected through the graph

Chapter 25 18

Motor control

Can view the motor control problem as a search problem in the **dynamic** rather than **kinematic** state space:

- state space defined by $x_1, x_2, \dots, \dot{x}_1, \dot{x}_2, \dots$
- continuous, high-dimensional (Sarcos humanoid: 162 dimensions)

Deterministic control: many problems are exactly solvable esp. if linear, low-dimensional, exactly known, observable

Simple **regulatory control** laws are effective for specified motions

Stochastic **optimal control**: very few problems exactly solvable
 ⇒ approximate/adaptive methods

Simple learning algorithm: Stochastic gradient

Minimize $E_\theta[y^2]$ by gradient descent:

$$\begin{aligned} \nabla_{\theta_0} E_\theta[y^2] &= \nabla_{\theta_0} \int P_{\theta_0}(\theta) F(\theta)^2 d\theta \\ &= \int \frac{\nabla_{\theta_0} P_{\theta_0}(\theta)}{P_{\theta_0}(\theta)} F(\theta)^2 P_{\theta_0}(\theta) d\theta \\ &= E_\theta \left[\frac{\nabla_{\theta_0} P_{\theta_0}(\theta)}{P_{\theta_0}(\theta)} y^2 \right] \end{aligned}$$

Given samples (θ_j, y_j) , $j = 1, \dots, N$, we have

$$\nabla_{\theta_0} \hat{E}_\theta[y^2] = \frac{1}{N} \sum_{j=1}^N \frac{\nabla_{\theta_0} P_{\theta_0}(\theta_j)}{P_{\theta_0}(\theta_j)} y_j^2$$

For Gaussian noise with covariance Σ , i.e., $P_{\theta_0}(\theta) = N(\theta_0, \Sigma)$, we obtain

$$\nabla_{\theta_0} \hat{E}_\theta[y^2] = \frac{1}{N} \sum_{j=1}^N \Sigma^{-1} (\theta_j - \theta_0) y_j^2$$

Biological motor control

Motor control systems are characterized by massive redundancy

Infinitely many trajectories achieve any given task

E.g., 3-link arm moving in plane throwing at a target
 simple 12-parameter controller, one degree of freedom at target
 11-dimensional continuous space of optimal controllers

Idea: if the arm is noisy, only "one" optimal policy minimizes error at target

I.e., noise-tolerance might explain actual motor behaviour

Harris & Wolpert (*Nature*, 1998): signal-dependent noise explains eye saccade velocity profile perfectly


What the algorithm is doing




Setup

Suppose a controller has "intended" control parameters θ_0 which are corrupted by noise, giving θ drawn from P_{θ_0}


Output (e.g., distance from target) $y = F(\theta)$;

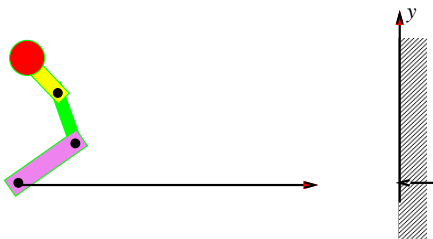

Results for 2-D controller

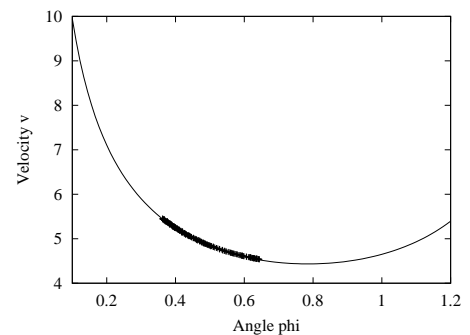


Results for 2-D controller

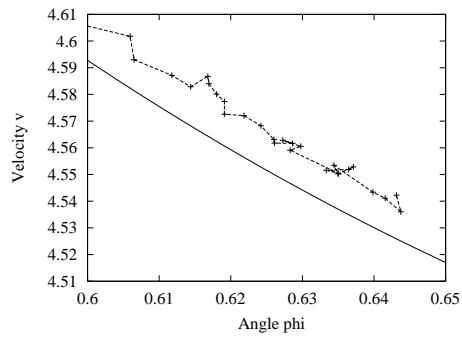

Chapter 25 25

Results for 2-D controller

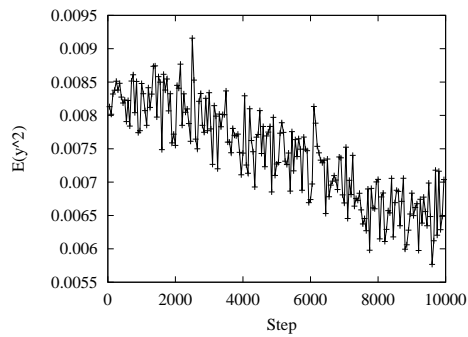

Chapter 25 26

Summary

The rubber hits the road

Mobile robots and manipulators

Degrees of freedom to define robot configuration

Localization and mapping as probabilistic inference problems
(require good sensor and motion models)

Motion planning in configuration space
requires some method for finitization

Chapter 25 27