CS252
Graduate Computer Architecture
Lecture 7

Scoreboard, Tomasulo, Register Renaming
February 8th, 2012

John Kubiatowicz

Electrical Engineering and Computer Sciences

University of California, Berkeley

http://www.eecs.berkeley.edu/~kubitron/cs252

Recall: Revised FP Loop Minimizing Stalls

```
1 Loop: LD    F0,0(R1)
2       stall
3       ADDD  F4,F0,F2
4       SUBI  R1,R1,8
5       BNEZ  R1,Loop    ;delayed branch
6       SD    8(R1),F4   ;altered when move past SUBI
```

Swap BNEZ and SD by changing address of SD

Instruction producing result	*Instruction using result*	*Latency in clock cycles*
FP ALU op	Another FP ALU op	3
FP ALU op	Store double	2
Load double	FP ALU op	1

6 clocks: Unroll loop 4 times code to make faster?

Recall: Software Pipelining Example

Before: Unrolled 3 times

```
1  LD    F0,0(R1)
2  ADDD  F4,F0,F2
3  SD    0(R1),F4
4  LD    F6,-8(R1)
5  ADDD  F8,F6,F2
6  SD    -8(R1),F8
7  LD    F10,-16(R1)
8  ADDD  F12,F10,F2
9  SD    -16(R1),F12
10 SUBI  R1,R1,#24
11 BNEZ  R1,LOOP
```

After: Software Pipelined

```
1  SD    0(R1),F4 ; Stores M[i]
2  ADDD  F4,F0,F2 ; Adds to M[i-1]
3  LD    F0,-16(R1);Loads M[i-2]
4  SUBI  R1,R1,#8
5  BNEZ  R1,LOOP
```

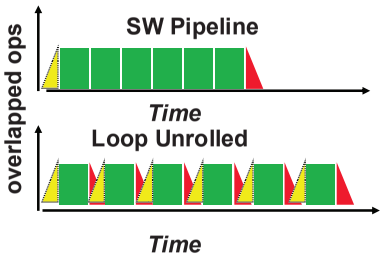

- Symbolic Loop Unrolling
  - Maximize result-use distance
  - Less code space than unrolling
  - Fill & drain pipe only once per loop vs. once per each unrolled iteration in loop unrolling

5 cycles per iteration

Trace Scheduling in VLIW

- Problem: need large blocks of instructions w/o branches
  - Only way to be able to find groups of unrelated instructions
  - Dynamic branch prediction not an option
- Parallelism across IF branches vs. LOOP branches
- Two steps:
  - *Trace Selection*
    - » Find likely sequence of basic blocks (*trace*) of (statically predicted or profile predicted) long sequence of straight-line code
  - *Trace Compaction*
    - » Squeeze trace into few VLIW instructions
    - » Need bookkeeping code in case prediction is wrong



- This is a form of compiler-generated speculation
  - Compiler must generate "fixup" code to handle cases in which trace is not the taken branch
  - Needs extra registers: undoes bad guess by discarding
- Subtle compiler bugs mean wrong answer vs. poorer performance; no hardware interlocks

When Safe to Unroll Loop?

- Example: Where are data dependencies? (A,B,C distinct & nonoverlapping)

```
for (i=0; i<100; i=i+1) {
      A[i+1] = A[i] + C[i];     /* S1 */
      B[i+1] = B[i] + A[i+1];   /* S2 */
}
```

1. S2 uses the value, A[i+1], computed by S1 in the same iteration.

2. S1 uses a value computed by S1 in an earlier iteration, since iteration i computes A[i+1] which is read in iteration i+1. The same is true of S2 for B[i] and B[i+1].

   This is a "loop-carried dependence": between iterations

- For our prior example, each iteration was distinct
  - In this case, iterations can't be executed in parallel, Right????

Does a loop-carried dependence mean there is no parallelism???

- Consider:

```
for (i=0; i< 8; i=i+1) {
      A = A + C[i];     /* S1 */
}
```

⇒ Could compute:

```
"Cycle 1":  temp0 = C[0] + C[1];
            temp1 = C[2] + C[3];
            temp2 = C[4] + C[5];
            temp3 = C[6] + C[7];
"Cycle 2":  temp4 = temp0 + temp1;
            temp5 = temp2 + temp3;
"Cycle 3":  A = temp4 + temp5;
```

- Relies on associative nature of "+".

Can we use HW to get CPI closer to 1?

- Why in HW at run time?
  - Works when can't know real dependence at compile time
  - Compiler simpler
  - Code for one machine runs well on another
- Key idea: Allow instructions behind stall to proceed

```
DIVD   F0,F2,F4
ADDD   F10,F0,F8
SUBD   F12,F8,F14
```

- Out-of-order execution => out-of-order completion.

Problems?

- How do we prevent WAR and WAW hazards?
- How do we deal with variable latency?
  - Forwarding for RAW hazards harder.

Instruction		Clock Cycle Number																
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
LD	F6,34(R2)	IF	ID	EX	MEM	WB												
LD	F2,45(R3)		IF	ID	EX	MEM	WB											
MULTD	F0,F2,F4			IF	ID	stall	M1	M2	M3	M4	M5	M6	M7	M8	M9	M10	MEM	WB
SUBD	F8,F6,F2				IF	ID	A1	A2	MEM	WB								
DIVD	F10,F0,F6					IF	ID	stall	stall	stall	stall	stall	stall	stall	stall	stall	D1	D2
ADDD	F6,F8,F2						IF	ID	A1	A2	MEM	WB						

RAW

WAR

- How to get precise exceptions?

Scoreboard: a bookkeeping technique

- Out-of-order execution divides ID stage:
  1. Issue—decode instructions, check for structural hazards
  2. Read operands—wait until no data hazards, then read operands
- Scoreboards date to CDC6600 in 1963
  - Readings for Monday include one on CDC6600
- Instructions execute whenever not dependent on previous instructions and no hazards.
- CDC 6600: In order issue, out-of-order execution, out-of-order commit (or completion)
  - No forwarding!
  - Imprecise interrupt/exception model for now

Scoreboard Architecture (CDC 6600)

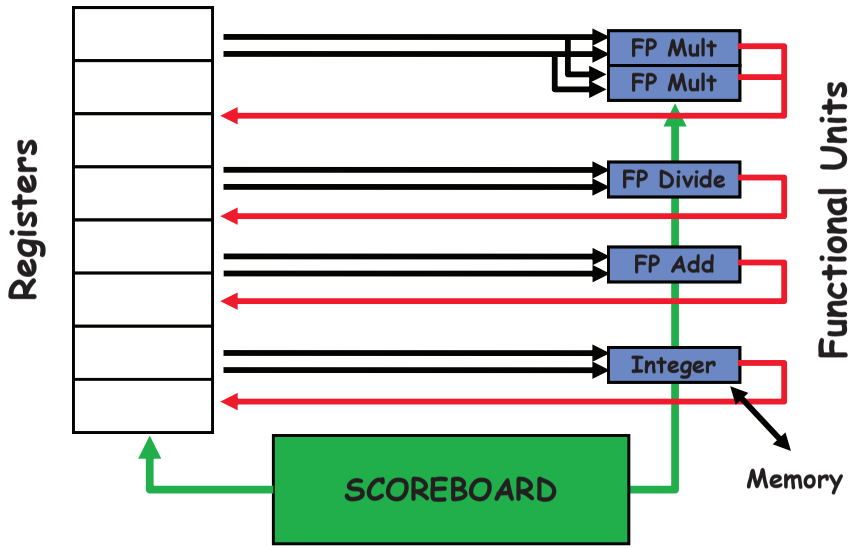

Scoreboard Implications

- Out-of-order completion => WAR, WAW hazards?
- Solutions for WAR:
  - Stall writeback until registers have been read
  - Read registers only during Read Operands stage
- Solution for WAW:
  - Detect hazard and stall issue of new instruction until other instruction completes
- No register renaming
- Need to have multiple instructions in execution phase => multiple execution units or pipelined execution units
- Scoreboard keeps track of dependencies between instructions that have already issued
- Scoreboard replaces ID, EX, WB with 4 stages

Four Stages of Scoreboard Control

- Issue—decode instructions & check for structural hazards (ID1)
  - Instructions issued in program order (for hazard checking)
  - Don't issue if structural hazard
  - Don't issue if instruction is output dependent on any previously issued but uncompleted instruction (no WAW hazards)
- Read operands—wait until no data hazards, then read operands (ID2)
  - All real dependencies (RAW hazards) resolved in this stage, since we wait for instructions to write back data.
  - No forwarding of data in this model!

Four Stages of Scoreboard Control

- **Execution—operate on operands (EX)**
  - The functional unit begins execution upon receiving operands. When the result is ready, it notifies the scoreboard that it has completed execution.
- **Write result—finish execution (WB)**
  - Stall until no WAR hazards with previous instructions:

Example:

```
DIVD   F0,F2,F4
ADDD   F10,F0,F8
SUBD   F8,F8,F14
```

CDC 6600 scoreboard would stall SUBD until ADDD reads operands

Three Parts of the Scoreboard

- **Instruction status:**
  Which of 4 steps the instruction is in
- **Functional unit status:—Indicates the state of the functional unit (FU). 9 fields for each functional unit**
  - Busy: Indicates whether the unit is busy or not
  - Op: Operation to perform in the unit (e.g., + or –)
  - Fi: Destination register
  - Fj,Fk: Source-register numbers
  - Qj,Qk: Functional units producing source registers Fj, Fk
  - Rj,Rk: Flags indicating when Fj, Fk are ready
- **Register result status—Indicates which functional unit will write each register, if one exists. Blank when no pending instructions will write that register**

Scoreboard Example

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2				
LD	F2	45+	R3				
MULTD	F0	F2	F4				
SUBD	F8	F6	F2				
DIVD	F10	F0	F6				
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock	F0	F2	F4	F6	F8	F10	F12	...	F30
FU									

Detailed Scoreboard Pipeline Control

Instruction status	Wait until	Bookkeeping
Issue	Not busy (FU) and not result(D)	Busy(FU)← yes; Op(FU)← op; Fi(FU)← `D'; Fj(FU)← `S1'; Fk(FU)← `S2'; Qj← Result('S1'); Qk← Result(`S2'); Rj← not Qj; Rk← not Qk; Result('D')← FU;
Read operands	Rj and Rk	Rj← No; Rk← No
Execution complete	Functional unit done	
Write result	∀f((Fj(f)≠Fi(FU) or Rj(f)=No) & (Fk(f)≠Fi(FU) or Rk(f)=No))	∀f(if Qj(f)=FU then Rj(f)← Yes); ∀f(if Qk(f)=FU then Rj(f)← Yes); Result(Fi(FU))← 0; Busy(FU)← No

Scoreboard Example: Cycle 1

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1			
LD	F2	45+	R3				
MULTD	F0	F2	F4				
SUBD	F8	F6	F2				
DIVD	F10	F0	F6				
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F6		R2				Yes
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
1	FU				Integer					

Scoreboard Example: Cycle 2

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2		
LD	F2	45+	R3				
MULTD	F0	F2	F4				
SUBD	F8	F6	F2				
DIVD	F10	F0	F6				
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F6		R2				Yes
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
2	FU				Integer					

- **Issue 2nd LD?**

Scoreboard Example: Cycle 3

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	
LD	F2	45+	R3				
MULTD	F0	F2	F4				
SUBD	F8	F6	F2				
DIVD	F10	F0	F6				
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F6		R2				No
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
3	FU				Integer					

- **Issue MULT?**

Scoreboard Example: Cycle 4

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3				
MULTD	F0	F2	F4				
SUBD	F8	F6	F2				
DIVD	F10	F0	F6				
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
4	FU				Integer					

Scoreboard Example: Cycle 5

Instruction status:

Instruction	j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+ R2	1	2	3	4
LD	F2	45+ R3	5			
MULTD	F0	F2 F4				
SUBD	F8	F6 F2				
DIVD	F10	F0 F6				
ADDD	F6	F8 F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F2		R3				Yes
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
5	FU		Integer							

Scoreboard Example: Cycle 6

Instruction status:

Instruction	j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+ R2	1	2	3	4
LD	F2	45+ R3	5	6		
MULTD	F0	F2 F4	6			
SUBD	F8	F6 F2				
DIVD	F10	F0 F6				
ADDD	F6	F8 F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F2		R3				Yes
	Mult1	Yes	Mult	F0	F2	F4	Integer		No	Yes
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
6	FU	Mult1	Integer							

Scoreboard Example: Cycle 7

Instruction status:

Instruction	j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+ R2	1	2	3	4
LD	F2	45+ R3	5	6	7	
MULTD	F0	F2 F4	6			
SUBD	F8	F6 F2	7			
DIVD	F10	F0 F6				
ADDD	F6	F8 F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F2		R3				No
	Mult1	Yes	Mult	F0	F2	F4	Integer		No	Yes
	Mult2	No								
	Add	Yes	Sub	F8	F6	F2		Integer	Yes	No
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
7	FU	Mult1	Integer			Add				

- Read multiply operands?

Scoreboard Example: Cycle 8a
(First half of clock cycle)

Instruction status:

Instruction	j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+ R2	1	2	3	4
LD	F2	45+ R3	5	6	7	
MULTD	F0	F2 F4	6			
SUBD	F8	F6 F2	7			
DIVD	F10	F0 F6	8			
ADDD	F6	F8 F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	Yes	Load	F2		R3				No
	Mult1	Yes	Mult	F0	F2	F4	Integer		No	Yes
	Mult2	No								
	Add	Yes	Sub	F8	F6	F2		Integer	Yes	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
8	FU	Mult1	Integer			Add	Divide			

Scoreboard Example: Cycle 8b
(Second half of clock cycle)

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6			
SUBD	F8	F6	F2	7			
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	Yes	Mult	F0	F2	F4			Yes	Yes
	Mult2	No								
	Add	Yes	Sub	F8	F6	F2			Yes	Yes
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
8	FU	Mult1				Add	Divide			

Scoreboard Example: Cycle 9

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9		
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
10	Mult1	Yes	Mult	F0	F2	F4			Yes	Yes
	Mult2	No								
2	Add	Yes	Sub	F8	F6	F2			Yes	Yes
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Note → Remaining

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
9	FU	Mult1				Add	Divide			

- Read operands for MULT & SUB? Issue ADDD?

Scoreboard Example: Cycle 10

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9		
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
9	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
1	Add	Yes	Sub	F8	F6	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
10	FU	Mult1				Add	Divide			

Scoreboard Example: Cycle 11

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
8	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
0	Add	Yes	Sub	F8	F6	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
11	FU	Mult1				Add	Divide			

Scoreboard Example: Cycle 12

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2				

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
7	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
	Add	No								
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
12	FU	Mult1					Divide			

- **Read operands for DIVD?**

Scoreboard Example: Cycle 13

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13			

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
6	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
	Add	Yes	Add	F6	F8	F2			Yes	Yes
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
13	FU	Mult1			Add		Divide			

Scoreboard Example: Cycle 14

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14		

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
5	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
2	Add	Yes	Add	F6	F8	F2			Yes	Yes
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
14	FU	Mult1			Add		Divide			

Scoreboard Example: Cycle 15

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14		

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
4	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
1	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
15	FU	Mult1			Add		Divide			

Scoreboard Example: Cycle 16

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14	16	

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
3	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
0	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
16	FU	Mult1			Add		Divide			

Scoreboard Example: Cycle 17

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14	16	

WAR Hazard!

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
2	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
17	FU	Mult1			Add		Divide			

- Why not write result of ADD???

Scoreboard Example: Cycle 18

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9		
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14	16	

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
1	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
18	FU	Mult1			Add		Divide			

Scoreboard Example: Cycle 19

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14	16	

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
0	Mult1	Yes	Mult	F0	F2	F4			No	No
	Mult2	No								
	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6	Mult1		No	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
19	FU	Mult1			Add		Divide			

Scoreboard Example: Cycle 20

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8			
ADDD	F6	F8	F2	13	14	16	

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6			Yes	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
20	FU				Add		Divide			

Scoreboard Example: Cycle 21

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8	21		
ADDD	F6	F8	F2	13	14	16	

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	Yes	Add	F6	F8	F2			No	No
	Divide	Yes	Div	F10	F0	F6			Yes	Yes

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
21	FU				Add		Divide			

- WAR Hazard is now gone...

Scoreboard Example: Cycle 22

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8	21		
ADDD	F6	F8	F2	13	14	16	22

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	No								
39	Divide	Yes	Div	F10	F0	F6			No	No

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
22	FU						Divide			

Faster than light computation (skip a couple of cycles)

Scoreboard Example: Cycle 61

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8	21	61	
ADDD	F6	F8	F2	13	14	16	22

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	No								
0	Divide	Yes	Div	F10	F0	F6			No	No

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
61	FU						Divide			

Scoreboard Example: Cycle 62

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8	21	61	62
ADDD	F6	F8	F2	13	14	16	22

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
62	FU									

Review: Scoreboard Example: Cycle 62

Instruction status:

Instruction		j	k	Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8	21	61	62
ADDD	F6	F8	F2	13	14	16	22

Functional unit status:

Time	Name	Busy	Op	dest Fi	S1 Fj	S2 Fk	FU Qj	FU Qk	Fj? Rj	Fk? Rk
	Integer	No								
	Mult1	No								
	Mult2	No								
	Add	No								
	Divide	No								

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
62	FU									

- In-order issue; out-of-order execute & commit

CDC 6600 Scoreboard

- Speedup 1.7 from compiler; 2.5 by hand
  BUT slow memory (no cache) limits benefit
- Limitations of 6600 scoreboard:
  - No forwarding hardware
  - Limited to instructions in basic block (small *window*)
  - Small number of functional units (structural hazards), especially integer/load store units
  - Do not issue on structural hazards
  - Wait for WAR hazards
  - Prevent WAW hazards

CS 252 Administrivia

- Interesting Resource: http://bitsavers.org
  - Has digital versions of users manuals for old machines
  - Quite interesting!
  - I'll link in some of them to your reading pages when it is appropriate
  - Very limited bandwidth: use mirrors such as: http://bitsavers.vt100.net
- Midterm I: March 21st
  - Will try to do a 5:00-8:00 slot. Would this work for people?
  - No class that day
  - Pizza afterwards…

Another Dynamic Algorithm: Tomasulo Algorithm

- For IBM 360/91 about 3 years after CDC 6600 (1966)
- Goal: High Performance without special compilers
- Differences between IBM 360 & CDC 6600 ISA
  - IBM has only 2 register specifiers/instr vs. 3 in CDC 6600
  - IBM has 4 FP registers vs. 8 in CDC 6600
  - IBM has memory-register ops
- Why Study? lead to Alpha 21264, HP 8000, MIPS 10000, Pentium II, PowerPC 604, …

Tomasulo Organization

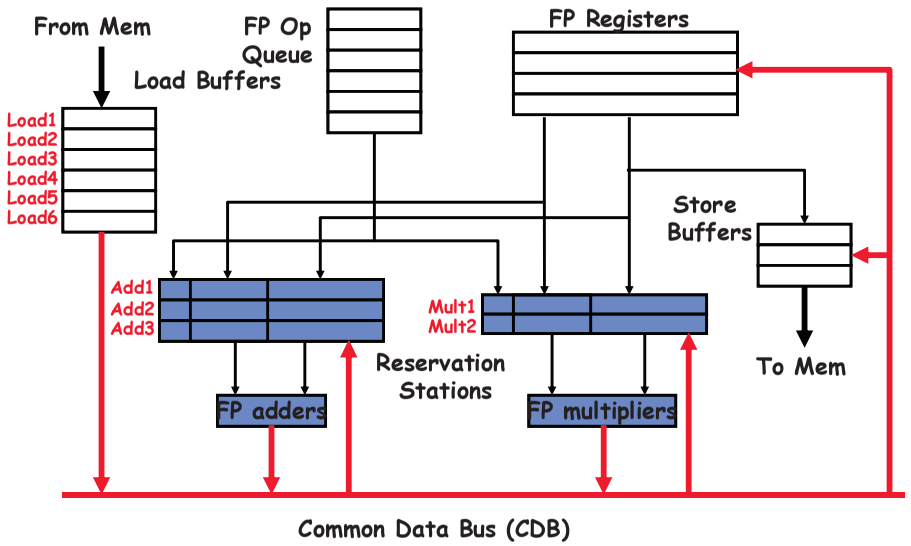

Tomasulo Algorithm vs. Scoreboard

- Control & buffers distributed with Function Units (FU) vs. centralized in scoreboard;
  - FU buffers called "reservation stations"; have pending operands
- Registers in instructions replaced by values or pointers to reservation stations(RS); called register renaming ;
  - avoids WAR, WAW hazards
  - More reservation stations than registers, so can do optimizations compilers can't
- Results to FU from RS, not through registers, over Common Data Bus that broadcasts results to all FUs
- Load and Stores treated as FUs with RSs as well
- Integer instructions can go past branches, allowing FP ops beyond basic block in FP queue

Reservation Station Components

Op: Operation to perform in the unit (e.g., + or –)

Vj, Vk: Value of Source operands

- Store buffers has V field, result to be stored

Qj, Qk: Reservation stations producing source registers (value to be written)

- Note: No ready flags as in Scoreboard; Qj,Qk=0 => ready
- Store buffers only have Qi for RS producing result

Busy: Indicates reservation station or FU is busy

Register result status—Indicates which functional unit will write each register, if one exists. Blank when no pending instructions that will write that register.

Three Stages of Tomasulo Algorithm

1. **Issue**—get instruction from FP Op Queue
   If reservation station free (no structural hazard), control issues instr & sends operands (renames registers).
2. **Execution**—operate on operands (EX)
   When both operands ready then execute; if not ready, watch Common Data Bus for result
3. **Write result**—finish execution (WB)
   Write on Common Data Bus to all awaiting units; mark reservation station available

- Normal data bus: data + destination ("go to" bus)
- Common data bus: data + source ("come from" bus)
  - 64 bits of data + 4 bits of Functional Unit source address
  - Write if matches expected Functional Unit (produces result)
  - Does the broadcast

Tomasulo Example

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2			
LD	F2	45+	R3			
MULTD	F0	F2	F4			
SUBD	F8	F6	F2			
DIVD	F10	F0	F6			
ADDD	F6	F8	F2			

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
	Mult2	No					

Register result status:

Clock	FU	F0	F2	F4	F6	F8	F10	F12	...	F30
0										

Tomasulo Example Cycle 1

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1		
LD	F2	45+	R3			
MULTD	F0	F2	F4			
SUBD	F8	F6	F2			
DIVD	F10	F0	F6			
ADDD	F6	F8	F2			

	Busy	Address
Load1	Yes	34+R2
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
	Mult2	No					

Register result status:

Clock	FU	F0	F2	F4	F6	F8	F10	F12	...	F30
1					Load1					

Tomasulo Example Cycle 2

Instruction status:

Instruction	j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	
LD	F2	45+	R3	2	
MULTD	F0	F2	F4		
SUBD	F8	F6	F2		
DIVD	F10	F0	F6		
ADDD	F6	F8	F2		

	Busy	Address
Load1	Yes	34+R2
Load2	Yes	45+R3
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
	Mult2	No					

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
2	FU		Load2		Load1					

Note: Unlike 6600, can have multiple loads outstanding

Tomasulo Example Cycle 3

Instruction status:

Instruction	j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3
LD	F2	45+	R3	2	
MULTD	F0	F2	F4	3	
SUBD	F8	F6	F2		
DIVD	F10	F0	F6		
ADDD	F6	F8	F2		

	Busy	Address
Load1	Yes	34+R2
Load2	Yes	45+R3
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	MULTD		R(F4)	Load2	
	Mult2	No					

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
3	FU	Mult1	Load2		Load1					

- Note: registers names are removed ("renamed") in Reservation Stations; MULT issued vs. scoreboard
- Load1 completing; what is waiting for Load1?

Tomasulo Example Cycle 4

Instruction status:

Instruction	j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3
LD	F2	45+	R3	2	4
MULTD	F0	F2	F4	3	
SUBD	F8	F6	F2	4	
DIVD	F10	F0	F6		
ADDD	F6	F8	F2		

	Busy	Address
Load1	No	
Load2	Yes	45+R3
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	Yes	SUBD	M(A1)			Load2
	Add2	No					
	Add3	No					
	Mult1	Yes	MULTD		R(F4)	Load2	
	Mult2	No					

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
4	FU	Mult1	Load2		M(A1)	Add1				

- Load2 completing; what is waiting for Load2?

Tomasulo Example Cycle 5

Instruction status:

Instruction	j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3
LD	F2	45+	R3	2	4
MULTD	F0	F2	F4	3	
SUBD	F8	F6	F2	4	
DIVD	F10	F0	F6	5	
ADDD	F6	F8	F2		

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
2	Add1	Yes	SUBD	M(A1)	M(A2)		
	Add2	No					
	Add3	No					
10	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
5	FU	Mult1	M(A2)		M(A1)	Add1	Mult2			

Tomasulo Example Cycle 6

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4		
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6		

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
1	Add1	Yes	SUBD	M(A1)	M(A2)		
	Add2	Yes	ADDD		M(A2)	Add1	
	Add3	No					
9	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
6	FU	Mult1	M(A2)		Add2	Add1	Mult2			

- **Issue ADDD here vs. scoreboard?**

Tomasulo Example Cycle 7

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6		

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
0	Add1	Yes	SUBD	M(A1)	M(A2)		
	Add2	Yes	ADDD		M(A2)	Add1	
	Add3	No					
8	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
7	FU	Mult1	M(A2)		Add2	Add1	Mult2			

- **Add1 completing; what is waiting for it?**

Tomasulo Example Cycle 8

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6		

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
2	Add2	Yes	ADDD	(M-M)	M(A2)		
	Add3	No					
7	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
8	FU	Mult1	M(A2)		Add2	(M-M)	Mult2			

Tomasulo Example Cycle 9

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6		

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
1	Add2	Yes	ADDD	(M-M)	M(A2)		
	Add3	No					
6	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
9	FU	Mult1	M(A2)		Add2	(M-M)	Mult2			

Tomasulo Example Cycle 10

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
0	Add2	Yes	ADDD	(M-M)	M(A2)		
	Add3	No					
5	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
10	FU	Mult1	M(A2)		Add2	(M-M)	Mult2			

- Add2 completing; what is waiting for it?

Tomasulo Example Cycle 11

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
4	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
11	FU	Mult1	M(A2)		(M-M+M	(M-M)	Mult2			

- Write result of ADDD here vs. scoreboard?
- All quick instructions complete in this cycle!

Tomasulo Example Cycle 12

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
3	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
12	FU	Mult1	M(A2)		(M-M+M	(M-M)	Mult2			

Tomasulo Example Cycle 13

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
2	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
13	FU	Mult1	M(A2)		(M-M+M	(M-M)	Mult2			

Tomasulo Example Cycle 14

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3		
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
1	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
14	FU	Mult1	M(A2)		(M-M+M	(M-M)	Mult2			

Tomasulo Example Cycle 15

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3	15	
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
0	Mult1	Yes	MULTD	M(A2)	R(F4)		
	Mult2	Yes	DIVD		M(A1)	Mult1	

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
15	FU	Mult1	M(A2)		(M-M+M	(M-M)	Mult2			

Tomasulo Example Cycle 16

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3	15	16
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
40	Mult2	Yes	DIVD	M*F4	M(A1)		

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
16	FU	M*F4	M(A2)		(M-M+M	(M-M)	Mult2			

Faster than light computation (skip a couple of cycles)

Tomasulo Example Cycle 55

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3	15	16
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5		
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
1	Mult2	Yes	DIVD	M*F4	M(A1)		

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
55	FU	M*F4	M(A2)		(M-M+M	(M-M)	Mult2			

Tomasulo Example Cycle 56

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3	15	16
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5	56	
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
0	Mult2	Yes	DIVD	M*F4	M(A1)		

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
56	FU	M*F4	M(A2)		(M-M+M	(M-M)	Mult2			

- Mult2 is completing; what is waiting for it?

Tomasulo Example Cycle 57

Instruction status:

Instruction		j	k	Issue	Exec Comp	Write Result
LD	F6	34+	R2	1	3	4
LD	F2	45+	R3	2	4	5
MULTD	F0	F2	F4	3	15	16
SUBD	F8	F6	F2	4	7	8
DIVD	F10	F0	F6	5	56	57
ADDD	F6	F8	F2	6	10	11

	Busy	Address
Load1	No	
Load2	No	
Load3	No	

Reservation Stations:

Time	Name	Busy	Op	S1 Vj	S2 Vk	RS Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
	Mult2	Yes	DIVD	M*F4	M(A1)		

Register result status:

Clock		F0	F2	F4	F6	F8	F10	F12	...	F30
56	FU	M*F4	M(A2)		(M-M+M	(M-M)	Result			

- Once again: In-order issue, out-of-order execution and completion.

Compare to Scoreboard Cycle 62

Instruction status:

Instruction		j	k	Read Issue	Read Oper	Exec Comp	Write Result
LD	F6	34+	R2	1	2	3	4
LD	F2	45+	R3	5	6	7	8
MULTD	F0	F2	F4	6	9	19	20
SUBD	F8	F6	F2	7	9	11	12
DIVD	F10	F0	F6	8	21	61	62
ADDD	F6	F8	F2	13	14	16	22

Issue	Exec Comp	Write Result
1	3	4
2	4	5
3	15	16
4	7	8
5	56	57
6	10	11

- Why take longer on scoreboard/6600?
  - Structural Hazards
  - Lack of forwarding

Tomasulo v. Scoreboard (IBM 360/91 v. CDC 6600)

Pipelined Functional Units	Multiple Functional Units
(6 load, 3 store, 3 +, 2 x/÷)	(1 load/store, 1 + , 2 x, 1 ÷)
window size: ≤ 14 instructions	≤ 5 instructions
No issue on structural hazard	same
WAR: renaming avoids	stall completion
WAW: renaming avoids	stall issue
Broadcast results from FU	Write/read registers
Control: reservation stations	central scoreboard

Recall: Unrolled Loop That Minimizes Stalls

```
1  Loop: LD     F0,0(R1)
2        LD     F6,-8(R1)
3        LD     F10,-16(R1)
4        LD     F14,-24(R1)
5        ADDD   F4,F0,F2
6        ADDD   F8,F6,F2
7        ADDD   F12,F10,F2
8        ADDD   F16,F14,F2
9        SD     0(R1),F4
10       SD     -8(R1),F8
11       SD     -16(R1),F12
12       SUBI   R1,R1,#32
13       BNEZ   R1,LOOP
14       SD     8(R1),F16    ; 8-32 = -24
```

- **What assumptions made when moved code?**
  - OK to move store past SUBI even though changes register
  - OK to move loads before stores: get right data?
  - When is it safe for compiler to do such changes?

14 clock cycles, or 3.5 per iteration

Tomasulo Loop Example

```
Loop: LD     F0    0    R1
      MULTD  F4    F0   F2
      SD     F4    0    R1
      SUBI   R1    R1   #8
      BNEZ   R1    Loop
```

- Assume Multiply takes 4 clocks
- Assume first load takes 8 clocks (cache miss), second load takes 1 clock (hit)
- To be clear, will show clocks for SUBI, BNEZ
- Reality: integer instructions ahead

Loop Example

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1			
1	MULTD F4	F0	F2			
1	SD F4	0	R1			
2	LD F0	0	R1			
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	No		
Store1	No		
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	Vk	Qj	Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
	Mult2	No					

S1 *S2* *RS*

Code:

LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
0	80	Fu									

Loop Example Cycle 1

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2			
1	SD F4	0	R1			
2	LD F0	0	R1			
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	No		
Load3	No		
Store1	No		
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	No						SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
1	80	Fu	Load1								

Loop Example Cycle 2

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1			
2	LD F0	0	R1			
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	No		
Load3	No		
Store1	No		
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F4)	Load1		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
2	80	Fu	Load1		Mult1						

Loop Example Cycle 3

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1			
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	No		
Load3	No		
Store1	Yes	80	Mult1
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F4)	Load1		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
3	80	Fu	Load1		Mult1						

- **Implicit renaming sets up "DataFlow" graph**

Loop Example Cycle 4

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1			
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	No		
Load3	No		
Store1	Yes	80	Mult1
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F4)	Load1		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
4	80	Fu	Load1		Mult1						

- **Dispatching SUBI Instruction**

Loop Example Cycle 5

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1			
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	No		
Load3	No		
Store1	Yes	80	Mult1
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	Multd		R(F4)	Load1	
	Mult2	No					

Code:

```
LD   F0  0  R1
MULTD F4 F0 F2
SD   F4  0  R1
SUBI R1  R1 #8
BNEZ R1  Loop
```

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
5	72	Fu	Load1		Mult1						

- And, BNEZ instruction

Loop Example Cycle 6

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6		
2	MULTD F4	F0	F2			
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	Yes	72	
Load3	No		
Store1	Yes	80	Mult1
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	Multd		R(F4)	Load1	
	Mult2	No					

Code:

```
LD   F0  0  R1
MULTD F4 F0 F2
SD   F4  0  R1
SUBI R1  R1 #8
BNEZ R1  Loop
```

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
6	72	Fu	Load2		Mult1						

- Notice that F0 never sees Load from location 80

Loop Example Cycle 7

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6		
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1			

	Busy	Addr	Fu
Load1	Yes	80	
Load2	Yes	72	
Load3	No		
Store1	Yes	80	Mult1
Store2	No		
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	Multd		R(F2)	Load1	
	Mult2	Yes	Multd		R(F2)	Load2	

Code:

```
LD   F0  0  R1
MULTD F4 F0 F2
SD   F4  0  R1
SUBI R1  R1 #8
BNEZ R1  Loop
```

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
7	72	Fu	Load2		Mult2						

- Register file completely detached from computation
- First and Second iteration completely overlapped

Loop Example Cycle 8

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1		
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6		
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	Yes	80	
Load2	Yes	72	
Load3	No		
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	Multd		R(F2)	Load1	
	Mult2	Yes	Multd		R(F2)	Load2	

Code:

```
LD   F0  0  R1
MULTD F4 F0 F2
SD   F4  0  R1
SUBI R1  R1 #8
BNEZ R1  Loop
```

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
8	72	Fu	Load2		Mult2						

Loop Example Cycle 9

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1	9	
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6		
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	Yes	80	
Load2	Yes	72	
Load3	No		
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	Multd		R(F2)	Load1	
	Mult2	Yes	Multd		R(F2)	Load2	

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
9	72	Fu	Load2		Mult2						

- Load1 completing: who is waiting?
- Note: Dispatching SUBI

Loop Example Cycle 10

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	Yes	72	
Load3	No		
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
4	Mult1	Yes	Multd	M[80]	R(F2)		
	Mult2	Yes	Multd		R(F2)	Load2	

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
10	64	Fu	Load2		Mult2						

- Load2 completing: who is waiting?
- Note: Dispatching BNEZ

Loop Example Cycle 11

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	11
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
3	Mult1	Yes	Multd	M[80]	R(F2)		
4	Mult2	Yes	Multd	M[72]	R(F2)		

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
11	64	Fu	Load3		Mult2						

- Next load in sequence

Loop Example Cycle 12

Instruction status:

ITER	Instruction	j	k	Issue	Exec Comp	Write Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	11
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
2	Mult1	Yes	Multd	M[80]	R(F2)		
3	Mult2	Yes	Multd	M[72]	R(F2)		

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
12	64	Fu	Load3		Mult2						

- Why not issue third multiply?

Loop Example Cycle 13

Instruction status:

ITER	Instruction	j	k	Issue	Comp	Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2		
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	11
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
1	Mult1	Yes	Multd	M[80]	R(F2)		
2	Mult2	Yes	Multd	M[72]	R(F2)		

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
13	64	Fu	Load3		Mult2						

Loop Example Cycle 14

Instruction status:

ITER	Instruction	j	k	Issue	Comp	Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2	14	
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	11
2	MULTD F4	F0	F2	7		
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	Mult1
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
0	Mult1	Yes	Multd	M[80]	R(F2)		
1	Mult2	Yes	Multd	M[72]	R(F2)		

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
14	64	Fu	Load3		Mult2						

- **Mult1 completing. Who is waiting?**

Loop Example Cycle 15

Instruction status:

ITER	Instruction	j	k	Issue	Comp	Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2	14	15
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	11
2	MULTD F4	F0	F2	7	15	
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	[80]*R2
Store2	Yes	72	Mult2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	No					
0	Mult2	Yes	Multd	M[72]	R(F2)		

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
15	64	Fu	Load3		Mult2						

- **Mult2 completing. Who is waiting?**

Loop Example Cycle 16

Instruction status:

ITER	Instruction	j	k	Issue	Comp	Result
1	LD F0	0	R1	1	9	10
1	MULTD F4	F0	F2	2	14	15
1	SD F4	0	R1	3		
2	LD F0	0	R1	6	10	11
2	MULTD F4	F0	F2	7	15	16
2	SD F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	[80]*R2
Store2	Yes	72	[72]*R2
Store3	No		

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk
	Add1	No					
	Add2	No					
	Add3	No					
	Mult1	Yes	Multd		R(F2)	Load3	
	Mult2	No					

Code:			
LD	F0	0	R1
MULTD	F4	F0	F2
SD	F4	0	R1
SUBI	R1	R1	#8
BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
16	64	Fu	Load3		Mult1						

Loop Example Cycle 17

Instruction status:

ITER	Instruction		j	k	Issue	Exec Comp	Write Result
1	LD	F0	0	R1	1	9	10
1	MULTD	F4	F0	F2	2	14	15
1	SD	F4	0	R1	3		
2	LD	F0	0	R1	6	10	11
2	MULTD	F4	F0	F2	7	15	16
2	SD	F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	[80]*R2
Store2	Yes	72	[72]*R2
Store3	Yes	64	Mult1

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F2)	Load3		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
17	64	Fu	Load3		Mult1						

Loop Example Cycle 18

Instruction status:

ITER	Instruction		j	k	Issue	Exec Comp	Write Result
1	LD	F0	0	R1	1	9	10
1	MULTD	F4	F0	F2	2	14	15
1	SD	F4	0	R1	3	18	
2	LD	F0	0	R1	6	10	11
2	MULTD	F4	F0	F2	7	15	16
2	SD	F4	0	R1	8		

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	Yes	80	[80]*R2
Store2	Yes	72	[72]*R2
Store3	Yes	64	Mult1

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F2)	Load3		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
18	64	Fu	Load3		Mult1						

Loop Example Cycle 19

Instruction status:

ITER	Instruction		j	k	Issue	Exec Comp	Write Result
1	LD	F0	0	R1	1	9	10
1	MULTD	F4	F0	F2	2	14	15
1	SD	F4	0	R1	3	18	19
2	LD	F0	0	R1	6	10	11
2	MULTD	F4	F0	F2	7	15	16
2	SD	F4	0	R1	8	19	

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	No		
Store2	Yes	72	[72]*R2
Store3	Yes	64	Mult1

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F2)	Load3		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
19	64	Fu	Load3		Mult1						

Loop Example Cycle 20

Instruction status:

ITER	Instruction		j	k	Issue	Exec Comp	Write Result
1	LD	F0	0	R1	1	9	10
1	MULTD	F4	F0	F2	2	14	15
1	SD	F4	0	R1	3	18	19
2	LD	F0	0	R1	6	10	11
2	MULTD	F4	F0	F2	7	15	16
2	SD	F4	0	R1	8	19	20

	Busy	Addr	Fu
Load1	No		
Load2	No		
Load3	Yes	64	
Store1	No		
Store2	No		
Store3	Yes	64	Mult1

Reservation Stations:

Time	Name	Busy	Op	Vj	S1 Vk	S2 Qj	RS Qk	Code:			
	Add1	No						LD	F0	0	R1
	Add2	No						MULTD	F4	F0	F2
	Add3	No						SD	F4	0	R1
	Mult1	Yes	Multd		R(F2)	Load3		SUBI	R1	R1	#8
	Mult2	No						BNEZ	R1	Loop	

Register result status

Clock	R1		F0	F2	F4	F6	F8	F10	F12	...	F30
20	64	Fu	Load3		Mult1						

Why can Tomasulo overlap iterations of loops?

- Register renaming
  - Multiple iterations use different physical destinations for registers (dynamic loop unrolling).
- Reservation stations
  - Permit instruction issue to advance past integer control flow operations
- Other idea: Tomasulo building dynamic "DataFlow" graph from instructions
  - Fits in with readings for Wednesday

Summary

- Scoreboard: Track dependencies through reservations
  - Simple scheme for out-of-order execution
  - WAW and WAR hazards force stalls – cannot handle multiple instructions with same destination register
- Reservations stations: *renaming* to larger set of registers + buffering source operands
  - Prevents registers as bottleneck
  - Avoids WAR, WAW hazards of Scoreboard
  - Allows loop unrolling in HW
- Dynamic hardware schemes can unroll loops dynamically in hardware
  - Form of limited dataflow
  - Register renaming is essential
- Lasting Contributions of Tomasulo Algorithm
  - Dynamic scheduling
  - Register renaming
  - Load/store disambiguation
- 360/91 descendants are Pentium II; PowerPC 604; MIPS R10000; HP-PA 8000; Alpha 21264