

# Velocity Motion Model

Pieter Abbeel  
UC Berkeley EECS

Many slides adapted from Thrun, Burgard and Fox, Probabilistic Robotics

## Velocity Motion Model

- Assumes:
  - Can control robot through two velocities:
    - Translational velocity  $v$
    - Rotational velocity  $\omega$

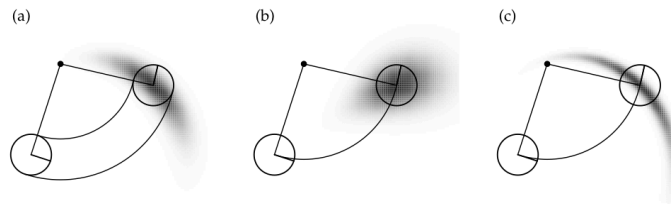



Figure 5.3 The velocity motion model, for different noise parameter settings.

## Sampling from Velocity Motion Model

$$\begin{aligned}\hat{v} &= v + \text{sample}(\alpha_1 v^2 + \alpha_2 \omega^2) \\ \hat{\omega} &= \omega + \text{sample}(\alpha_3 v^2 + \alpha_4 \omega^2) \\ \hat{\gamma} &= \text{sample}(\alpha_5 v^2 + \alpha_6 \omega^2) \\ x' &= x + \frac{\hat{v}}{\hat{\omega}} (\sin(\theta + \hat{\omega}\Delta t) - \sin(\theta)) \\ y' &= y + \frac{\hat{v}}{\hat{\omega}} (\cos(\theta) - \cos(\theta + \hat{\omega}\Delta t)) \\ \theta' &= \theta + \hat{\omega}\Delta t + \hat{\gamma}\Delta t\end{aligned}$$

$\text{sample}(v)$  provides a sample from a distribution with mean zero and variance  $v$

## Samples from Velocity Motion Model

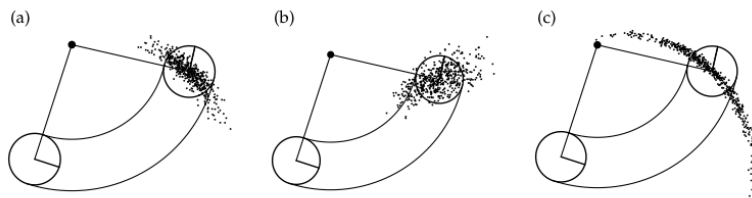

**Figure 5.4** Sampling from the velocity motion model, using the same parameters as in Figure 5.3. Each diagram shows 500 samples.