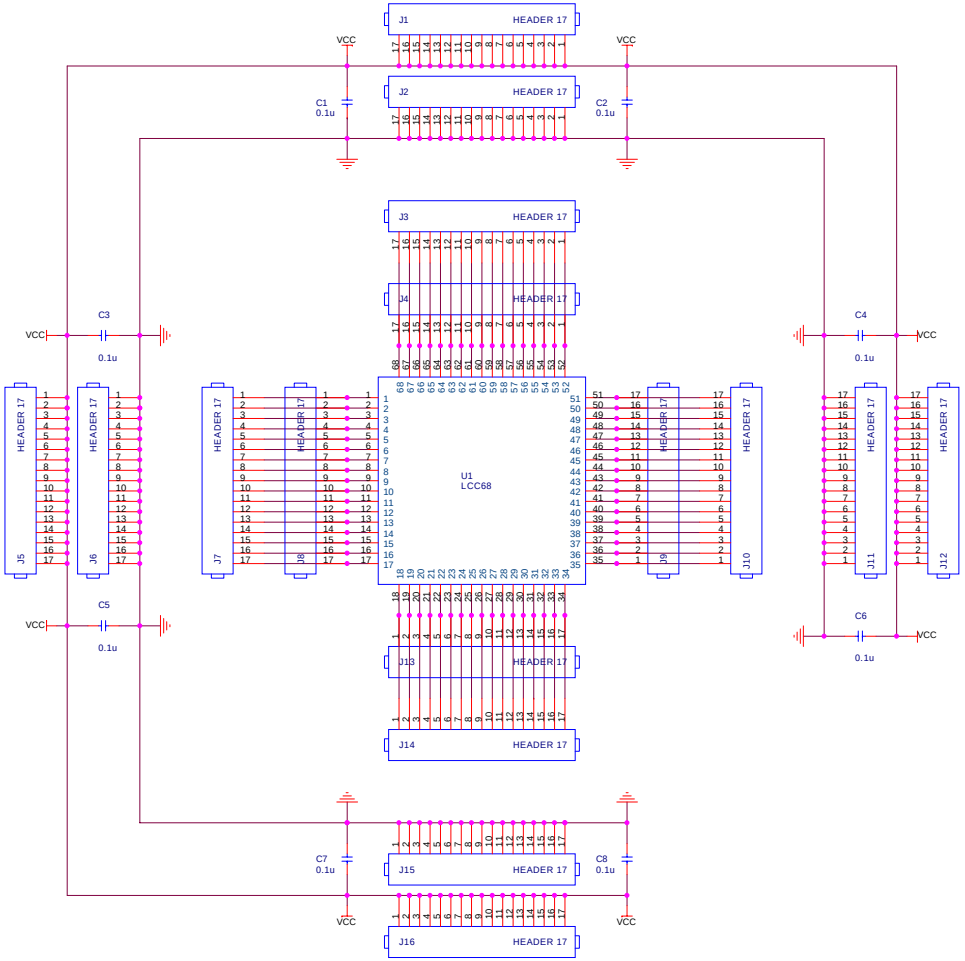





Mounting Holes



Figure 1: System floorplan

NOTES
=====

1. **Board Dimensions: 3" x 3" x 0.039"**
2. **Soldermask: Yellow.**
3. **Silkscreen: Blue.**
4. **Ensure GND - SIGNAL - SIGNAL - PWR outside-to-inside ordering for headers (this ordering allows signals to be jumpered to either PWR or GND).**
5. **U1 is an overlay of an LCC-68 footprint and SKT1164 footprint.**
6. **Four holes under U1 align with SKT1164 socket ejection holes.**
7. **All jumpers are 0.1" headers.**
8. **Ground pour on bottom side**
9. **Four (4) PTH mounts 0.125" diameter, 0.250" annular ring flush with edges (shaded black circles).**
10. **Use Digikey P/N: S9002-ND shunts (Sullins SSC02SYAN).**

Title: Epic Breakout		
Size: C	Document Number: (c) Copyright 2007: Prabal Dutta / UC Berkeley	Rev: A
Date: Thursday, July 12, 2007	Sheet 1 of 1	