

CS-184: Computer Graphics

Lecture #9: Scan Conversion

Prof. James O'Brien
University of California, Berkeley

V2013.09.1.0

With additional slides based on those of Maneesh Agrawala

1

Today

- 2D Scan Conversion
 - Drawing Lines
 - Drawing Curves
 - Filled Polygons
 - Filling Algorithms


2

2

Wednesday, February 27, 13

Drawing a Line

- Basically, its easy... but for the details
- Lines are a basic primitive that needs to be done well...




3

3

Drawing a Line

- Basically, its easy... but for the details
- Lines are a basic primitive that needs to be done well...

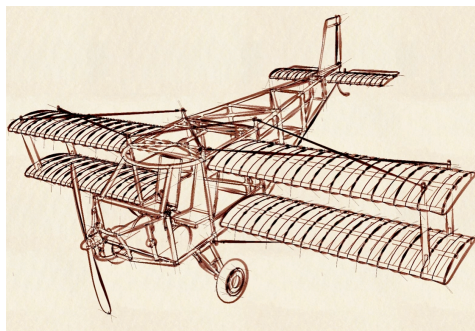


4

4

From "A Procedural Approach to Style for NPR Line Drawing from 3D models,"
by Grabli, Durand, Turquin, Sillion

Wednesday, February 27, 13


Drawing a Line

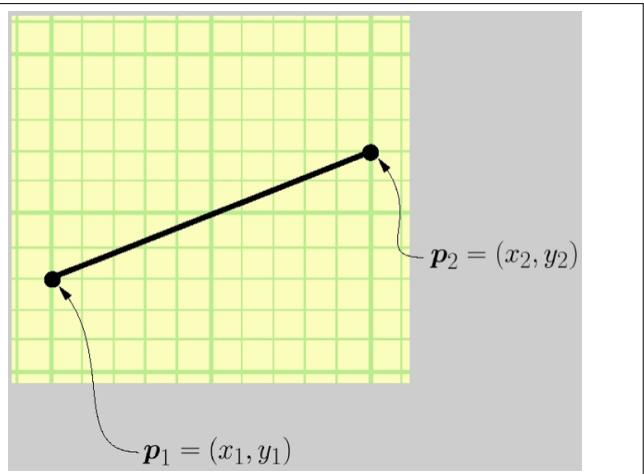

5

5

Drawing a Line

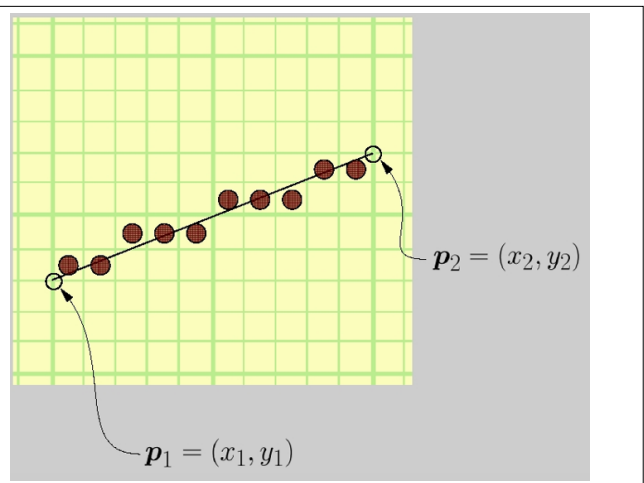


6

6

Drawing a Line

- Some things to consider
 - How thick are lines?
 - How should they join up?
 - Which pixels are the right ones?


For example:



7

7

Drawing a Line

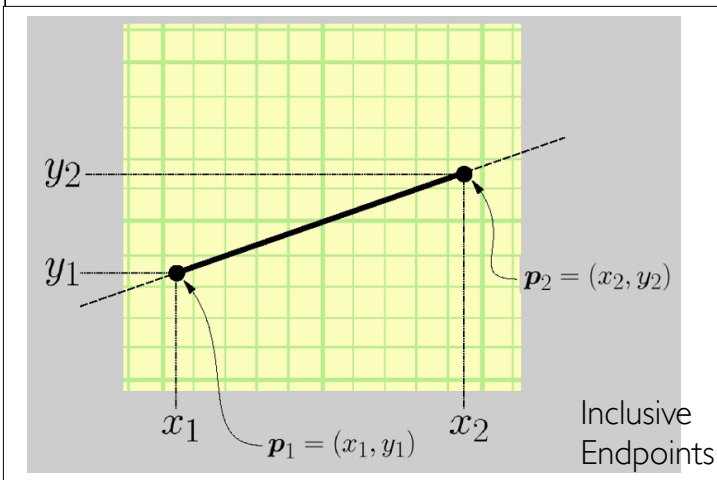

8


8

Drawing a Line

$$y = m \cdot x + b, x \in [x_1, x_2]$$


$$m = \frac{y_2 - y_1}{x_2 - x_1}$$

$$b = y_1 - m \cdot x_1$$

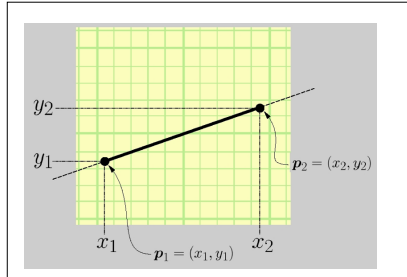


9

Drawing a Line

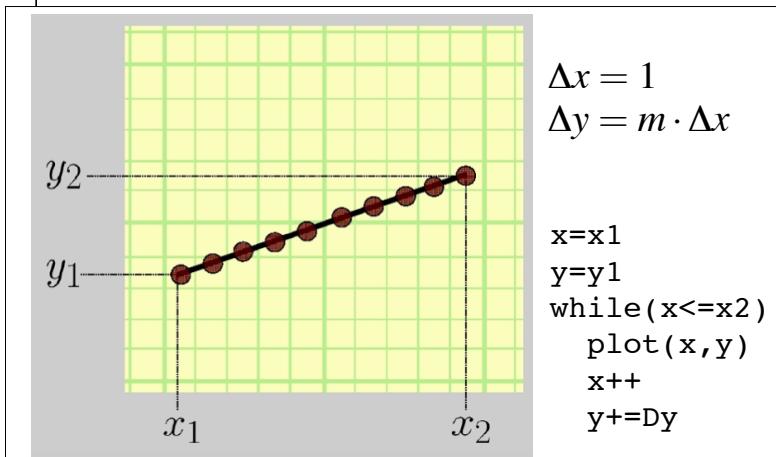


10

Drawing a Line

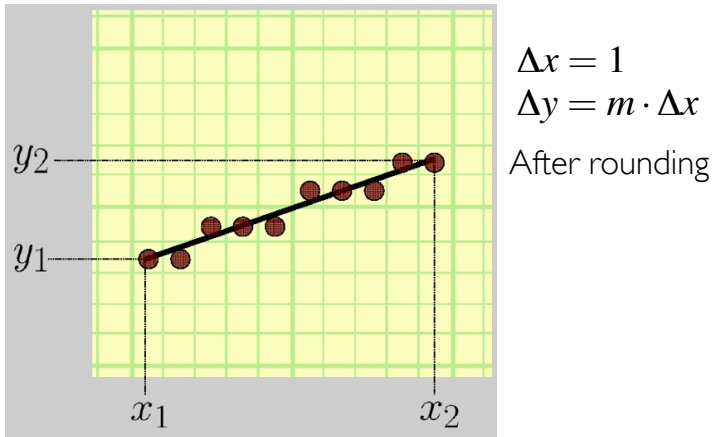


11

Drawing a Line

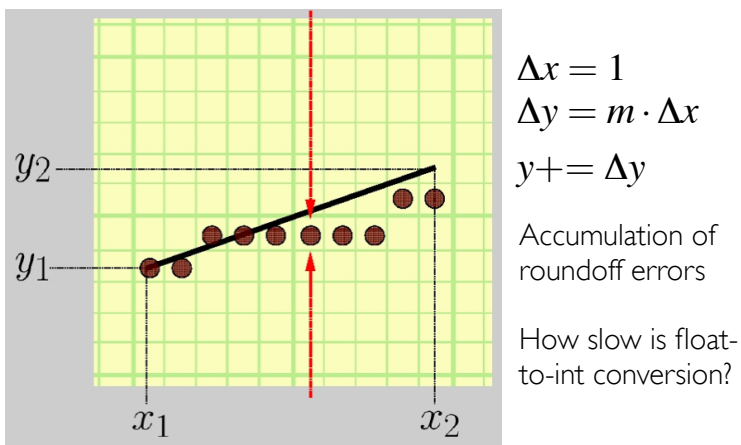

12

Drawing a Line

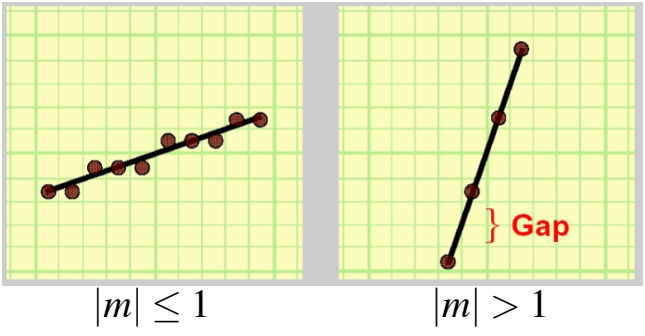

13

13

Drawing a Line

```
void drawLine-Error1(int x1,x2, int y1,y2)
{
    float m = float(y2-y1)/(x2-x1)
    int x = x1
    float y = y1

    while (x <= x2)
    {
        setPixel(x,round(y),PIXEL_ON)

        x += 1
        y += m
    }
}
```

Not exact math

Accumulates errors

14

14

Drawing a Line

```
void drawLine-Error2(int x1,x2, int y1,y2)

float m = float(y2-y1)/(x2-x1)
int x = x1
int y = y1
float e = 0.0

while (x <= x2)

    setPixel(x,□,PIXEL_ON)

    x += 1
    e += m
    if (e >= 0.5)
        y+=1
        e-=1.0
```

No more rounding

15

15

Drawing a Line

```
void drawLine-Error3(int x1,x2, int y1,y2)

int x = x1
int y = y1
float e = -0.5

while (x <= x2)

    setPixel(x,y,PIXEL_ON)

    x += 1
    e += float(y2-y1)/(x2-x1)
    if (e >= 0.0)
        y+=1
        e-=1.0
```

16

16

Drawing a Line

```
void drawLine-Error4(int x1,x2, int y1,y2)

    int x = x1
    int y = y1
    float e = -0.5*(x2-x1)           // was -0.5

    while (x <= x2)

        setPixel(x,y,PIXEL_ON)

        x += 1
        e += y2-y1                   // was /(x2-x1)
        if (e >= 0.0)                // no change
            y+=1
            e--=(x2-x1)              // was 1.0
```

17

17

Drawing a Line

```
void drawLine-Error5(int x1,x2, int y1,y2)

    int x = x1
    int y = y1
    int e = -(x2-x1)                 // removed *0.5

    while (x <= x2)

        setPixel(x,y,PIXEL_ON)

        x += 1
        e += 2*(y2-y1)               // added 2*
        if (e >= 0.0)                // no change
            y+=1
            e--=2*(x2-x1)            // added 2*
```

18

18

Drawing a Line

```
void drawLine-Bresenham(int x1,x2, int y1,y2)

int x = x1
int y = y1
int e = -(x2-x1)

while (x <= x2)

    setPixel(x,y,PIXEL_ON)

    x += 1
    e += 2*(y2-y1)
    if (e >= 0.0)
        y+=1
        e-=2*(x2-x1)
```

Faster

Not wrong


$$0 \leq m \leq 1$$

$$x_1 \leq x_2$$

19

19

Drawing Curves

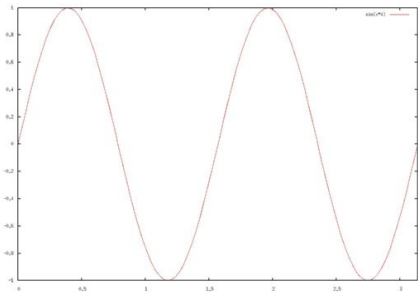

$$y = f(x)$$

Only one value of y for each value of x...

20

20


Drawing Curves

- Parametric curves
 - Both x and y are a function of some third parameter

$$x = f(u)$$
$$y = f(u)$$

$$\mathbf{x} = \mathbf{f}(u)$$


$$u \in [u_0 \dots u_1]$$



21

21

Drawing Curves

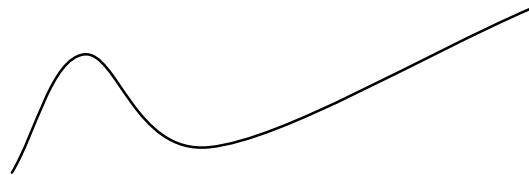

$$\mathbf{x} = \mathbf{f}(u)$$


$$u \in [u_0 \dots u_1]$$

22

22

Drawing Curves

- Draw curves by drawing line segments
 - Must take care in computing end points for lines
 - How long should each line segment be?

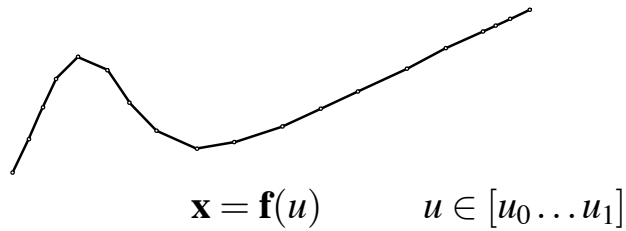


23

23

Drawing Curves

- Draw curves by drawing line segments
 - Must take care in computing end points for lines
 - How long should each line segment be?
 - Variable spaced points

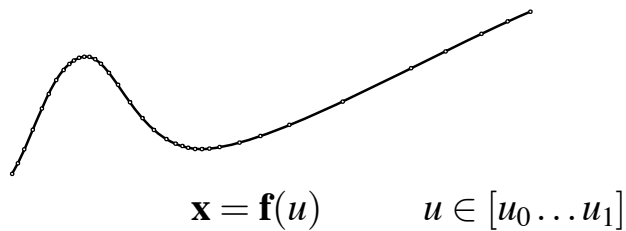


24

24

Drawing Curves

- Midpoint-test subdivision

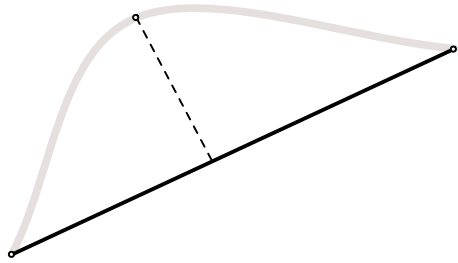


$$|\mathbf{f}(u_{mid}) - \mathbf{I}(0.5)|$$

25

25

Drawing Curves

- Midpoint-test subdivision

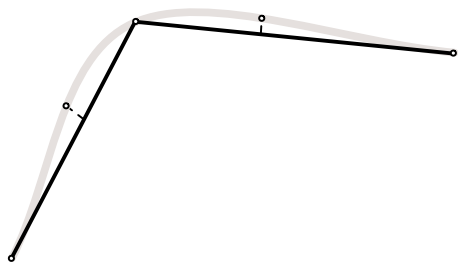


$$|\mathbf{f}(u_{mid}) - \mathbf{I}(0.5)|$$

26

26

Drawing Curves

- Midpoint-test subdivision

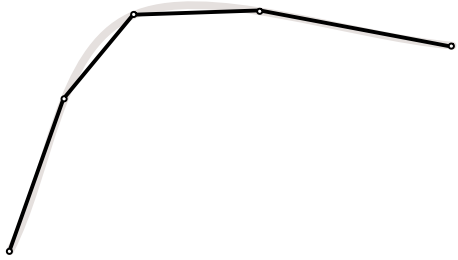


$$|f(u_{mid}) - I(0.5)|$$

27

27

Drawing Curves

- Midpoint-test subdivision
 - Not perfect
 - We need more information for a guarantee...

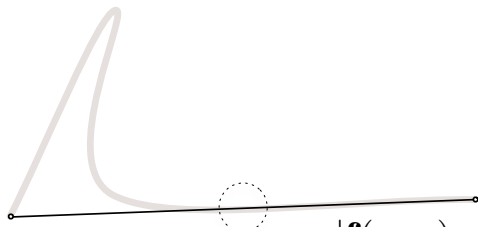

$$|f(u_{mid}) - I(0.5)|$$

28


28

Filling Triangles

- Render an image of a geometric primitive by setting pixel colors

```
void SetPixel(int x, int y, Color rgba)
```

- Example: Filling the inside of a triangle




29

Filling Triangles

- Render an image of a geometric primitive by setting pixel colors

```
void SetPixel(int x, int y, Color rgba)
```


- Example: Filling the inside of a triangle



30

Triangle Scan Conversion


- Properties of a good algorithm
 - Symmetric
 - Straight edges
 - Antialiased edges
 - No cracks between adjacent primitives
 - MUST BE FAST!



31

Triangle Scan Conversion

- Properties of a good algorithm
 - Symmetric
 - Straight edges
 - Antialiased edges
 - No cracks between adjacent primitives
 - MUST BE FAST!




32

Simple Algorithm

- Color all pixels inside triangle


```
void ScanTriangle(Triangle T, Color rgba){  
  for each pixel P at (x,y){  
    if (Inside(T, P))  
      SetPixel(x, y, rgba);  
  }  
}
```



33

Line Defines Two Halfspaces


- Implicit equation for a line
 - On line: $ax + by + c = 0$
 - On right: $ax + by + c < 0$
 - On left: $ax + by + c > 0$



34

Inside Triangle Test


- Point is inside triangle if it is in positive halfspace of all three boundary lines
 - Triangle vertices are ordered counter-clockwise
 - Point must be on the left side of every boundary line

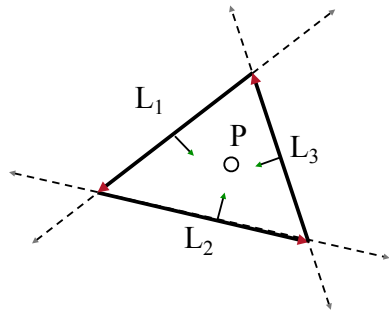

35

Inside Triangle Test

```
Boolean Inside(Triangle T, Point P)
{
  for each boundary line L of T {
    Scalar d = L.a*P.x + L.b*P.y + L.c;
    if (d < 0.0) return FALSE;
  }
  return TRUE;
}
```

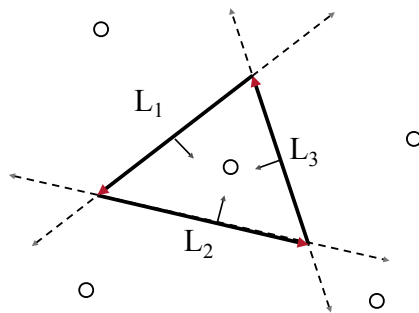


36

Simple Algorithm

- What is bad about this algorithm?


```
void ScanTriangle(Triangle T, Color rgba){  
  for each pixel P at (x,y){  
    if (Inside(T, P))  
      SetPixel(x, y, rgba);  
  }  
}
```



37

Triangle Sweep-Line Algorithm

- Take advantage of spatial coherence
 - Compute which pixels are inside using horizontal spans
 - Process horizontal spans in scan-line order
- Take advantage of edge linearity
 - Use edge slopes to update coordinates incrementally




38

Triangle Sweep-Line Algorithm

```
void ScanTriangle(Triangle T, Color rgba){  
  for each edge pair {  
    initialize  $x_L, x_R$ ;  
    compute  $dx_L/dy_L$  and  $dx_R/dy_R$ ;  
    for each scanline at y  
      for (int x = ceil( $x_L$ ); x <=  $x_R$ ; x++)  
        SetPixel(x, y, rgba);  
     $x_L += dx_L/dy_L$ ;  
     $x_R += dx_R/dy_R$ ;  
  }  
}
```



Bresenham's algorithm works the same way, but uses only integer operations!



39

Antialiasing

Desired solution of an integral over pixel

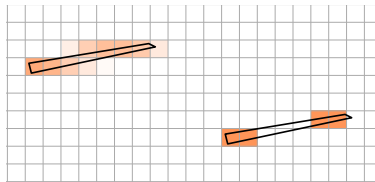


40

40

Hardware Antialiasing

Supersample pixels


- Multiple samples per pixel
- Average subpixel intensities (box filter)
- Trades intensity resolution for spatial resolution

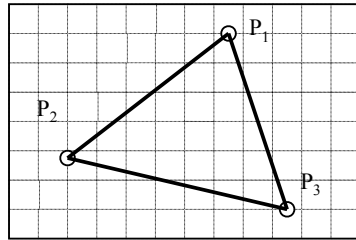

41

Optimize for Triangles


- Spilt triangle into two parts
 - Two edges per part
 - Y-span is monotonic
- For each row
 - Interpolate span
- Interpolate barycentric coordinates

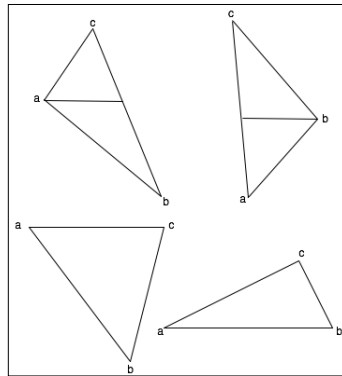

42

Hardware Scan Conversion


- Convert everything into triangles
 - Scan convert the triangles

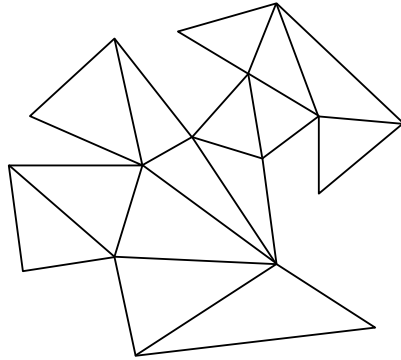

43

Polygon Scan Conversion

- Fill pixels inside a polygon
 - Triangle
 - Quadrilateral
 - Convex
 - Star-shaped
 - Concave
 - Self-intersecting
 - Holes

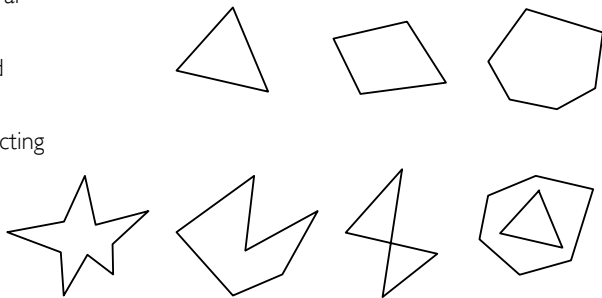


What problems do we encounter with arbitrary polygons?

44

Polygon Scan Conversion


- Need better test for points inside polygon
 - Triangle method works only for convex polygons

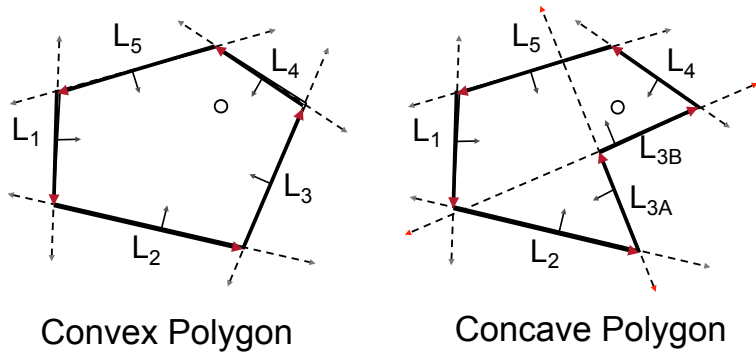

45

Inside Polygon Rule


- What is a good rule for which pixels are inside?

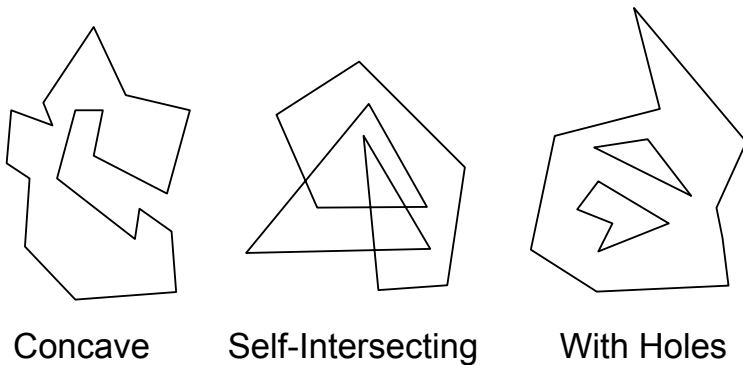

46

Inside Polygon Rule

- Odd-parity rule
 - Any ray from P to infinity crosses odd number of edges

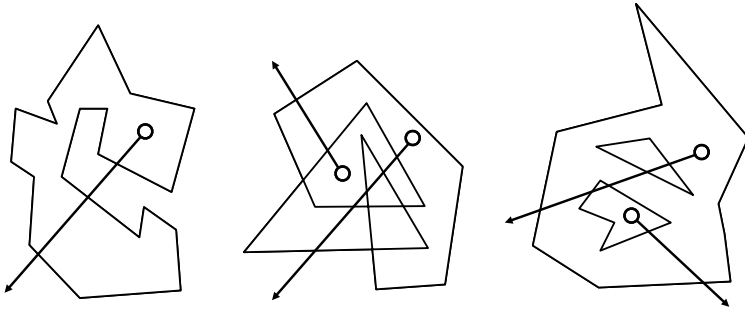


Concave

Self-Intersecting

With Holes

47


Inside/Outside Testing

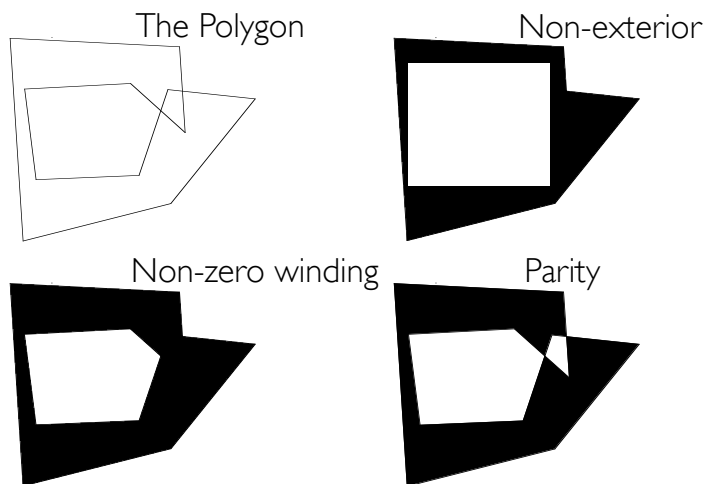

48

48


Filled Polygons

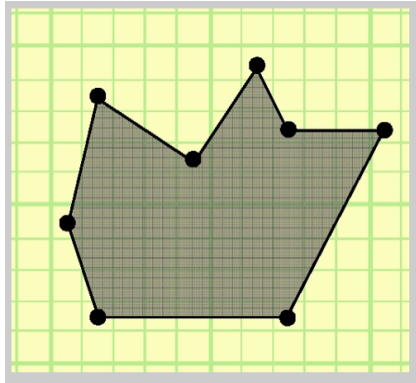

49

49

Filled Polygons

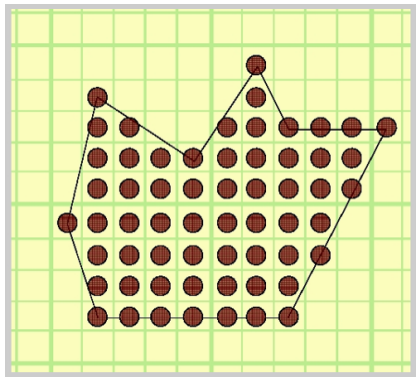


50

50

Filled Polygons

Toggle inside/outside flag to "INSIDE"

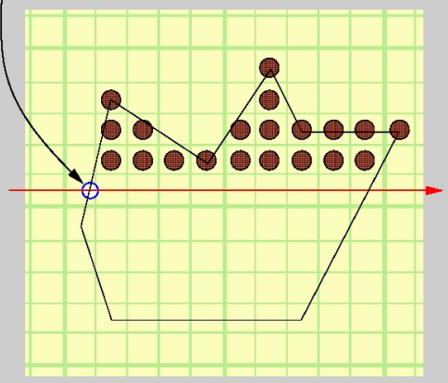


51

51

Filled Polygons

Toggle inside/outside flag to "OUTSIDE"

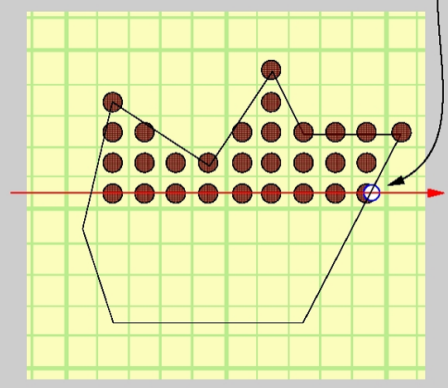


52

52

Filled Polygons

What happens at these locations?

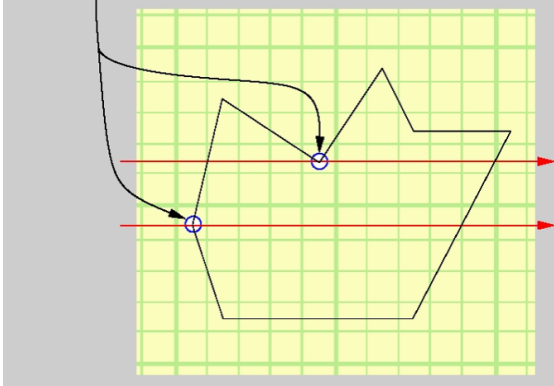


53

53

Filled Polygons

If we count ONCE...

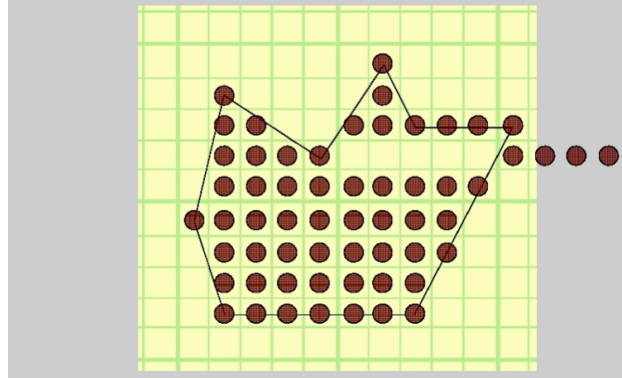


54

54

Filled Polygons

If we count TWICE...

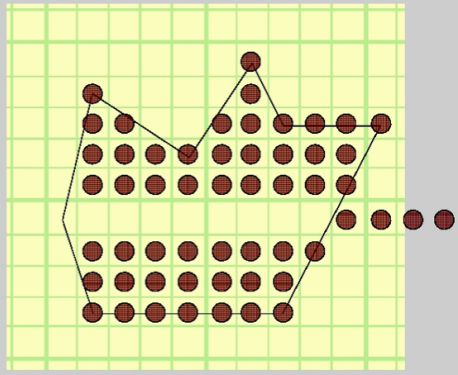


55

55

Filled Polygons

Treat (scan y = vertex y) as (scan y > vertex y)

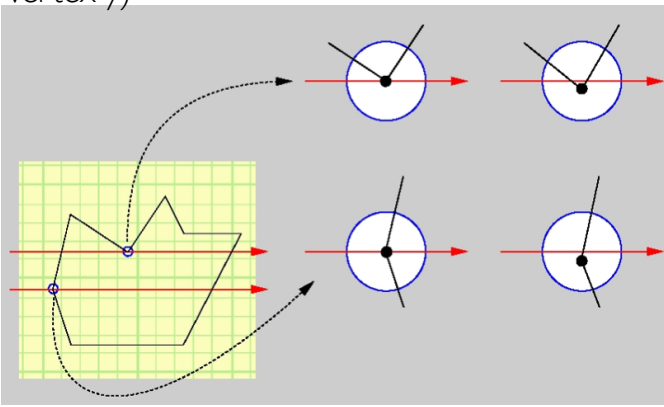


56

56

Filled Polygons

Horizontal edges

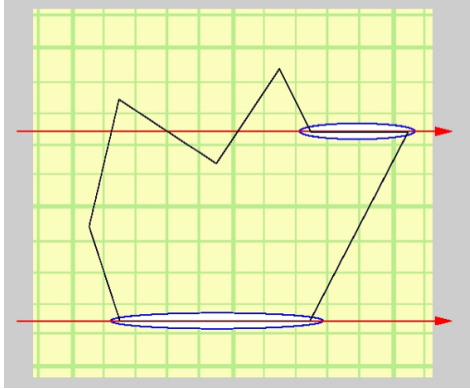


57

57

Filled Polygons

Horizontal edges

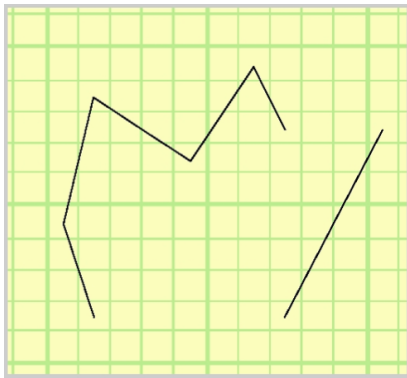


58

58

Filled Polygons

- “Equality Removal” applies to all vertices
- Both x and y coordinates

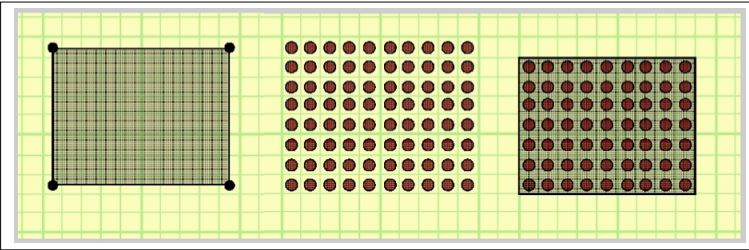


59

59

Filled Polygons

- Final result:

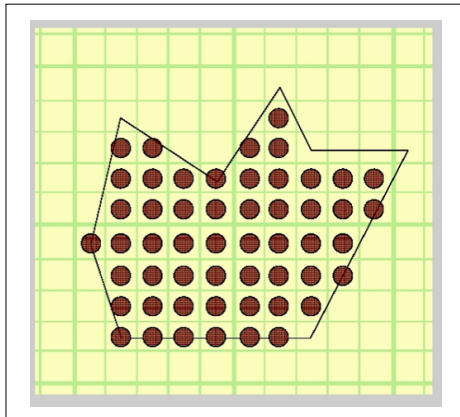


60

60

Filled Polygons

- Who does this pixel belong to?

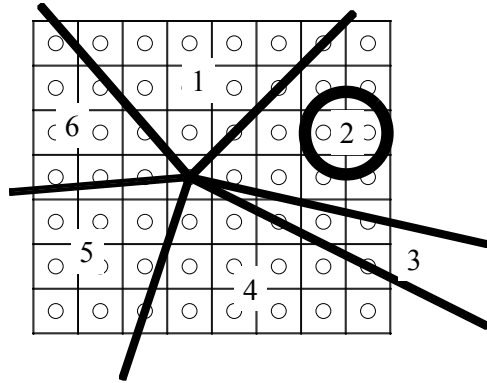


61

61

Drawing a Line

- How thick?



- Ends?



62

62

Drawing a Line

- Joining?



Ugly



Bevel



Round





Miter

63

63


Flood Fill



64

64

Flood Fill

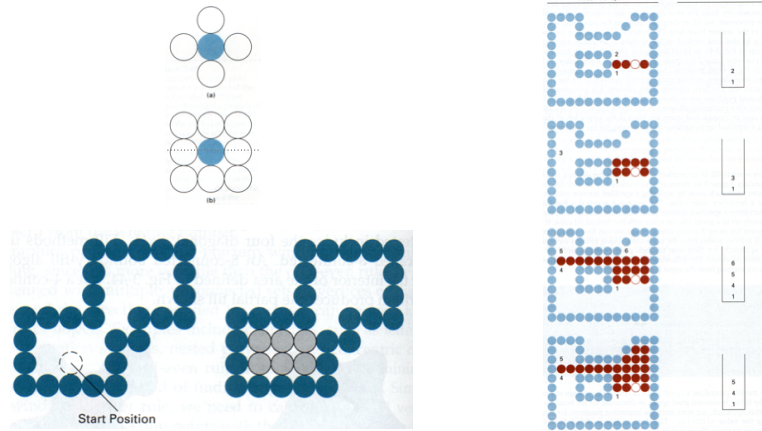


65

65

Span-Based Algorithm

Definition: a *run* is a horizontal span of identically colored pixels



1. Start at pixel "s", the seed.
2. Find the run containing "s" ("b" to "a").
3. Fill that run with the new color.
4. Search every pixel above run, looking for pixels of interior color
5. For each one found,
6. Find left side of that run ("c"), and push that on a stack.
7. Repeat lines 4-7 for the pixels below ("d").
8. Pop stack and repeat procedure with the new seed

The algorithm finds runs ending at "e", "f", "g", "h", and "i"

66